

(19)



(11)

**EP 1 544 881 B1**

(12)

**EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention  
of the grant of the patent:

**24.01.2007 Bulletin 2007/04**

(51) Int Cl.:

**H01H 33/70 (2006.01)**

(21) Application number: **03079013.3**

(22) Date of filing: **19.12.2003**

(54) **Gas-insulated switching device with a nozzle**

Gasisolierte Schaltvorrichtung mit einer Düse

Dispositif de commutation à isolation gazeuse avec une buse

(84) Designated Contracting States:

**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR  
HU IE IT LI LU MC NL PT RO SE SI SK TR**

(43) Date of publication of application:

**22.06.2005 Bulletin 2005/25**

(73) Proprietor: **ABB Technology AG**

**8050 Zürich (CH)**

(72) Inventors:

- **Capitanio, Roberto**  
**24123 Bergamo (IT)**

• **Cereda, Carlo**

**24043 Caravaggio (BG) (IT)**

(74) Representative: **De Santis, Giovanni et al**

**ABB Service S.r.l.,**

**Via L. Lama, 33**

**20099 Sesto San Giovanni (MI) (IT)**

(56) References cited:

**DE-C- 880 338**

**US-A- 3 364 327**

**US-A- 4 418 255**

**US-A- 4 420 662**

**US-A- 4 445 019**

**US-A- 4 707 576**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

## Description

**[0001]** The present invention relates to a gas-insulated switching device for high- or medium-voltage applications, i.e. for voltages above 1000 Volt, comprising a nozzle.

**[0002]** As it is widely known in the art, gas insulated switching devices for high- and medium-voltage applications normally comprise a fixed arc contact and a mobile arc contact; it is also known that several types of gas switching devices for high- and medium-voltage applications may additionally have a so-called fixed main or permanent contact and a corresponding mobile main or permanent contact through which the current mainly passes when the gas switching device is in a closed position.

**[0003]** In both solutions, during opening/closing operations, usually electric arcs strike between the arcing contacts; a nozzle assembly is generally positioned around the arc contacts in order to delimit the arcing zone and to restrain the potentially negative effects of such electric arcs. By means of the nozzle assembly, a sufficient flow of gas is obtained in the arcing zone so as to cool the arcing contacts sufficiently and remove heat; thus, circuit breaking is enabled to be performed over the entire required interruption window and for currents going up to the short-circuit breaking capacity.

**[0004]** Examples of existing nozzles are disclosed in patent documents US 6,483,064, US 5,216,214 and EP 0524088.

**[0005]** At present, known nozzle assemblies have some drawbacks, as regard in particular to their constructive structure, manufacturing, and mounting in switching devices as well.

**[0006]** Indeed, known nozzle assemblies are generally realized by means of several different pieces, mainly a converging-diverging body, made of insulating material, a so-called puffer cap, and other additional components for realizing the mechanical connections. In particular, the insulating body is generally realized by using a cylinder of raw material which is machined, e.g. with a lathe, so as to obtain the desired shape; alternatively, the raw material is first preformed, thus achieving a rough shape, and then machined with suitable tools. In both cases a lot of raw materials is wasted and machining is usually difficult and time consuming.

**[0007]** Hence, costs and manufacturing time are not optimized, whilst assembly inside the switching device, due to the use of different pieces, is rather cumbersome and mechanically complicated.

**[0008]** In particular, when the main contacts are present, the nozzle assembly is mounted by means of mechanical connection means on the mobile equipment of the main mobile contact, as described, for example in patent US 5,939,692; in addition to being more complicated, this solution is clearly not suitable when the switching device has only the arc contacts, thus forcing to adopt different constructive solutions and lacking in flexibility.

**[0009]** One example of a compressed-gas circuit

breaker according to the preamble of claim 1 is disclosed in US patent nr. 4,420,662 which describes a nozzle secured to the stationary contact member.

**[0010]** Finally, gas switching devices for high- and medium-voltage applications may further comprise an electrically conductive shield, positioned externally to and operatively associated with the nozzle assembly, in order to optimize the electric field distribution in the arcing zone and in its surroundings. Therefore, also this function is usually performed by means of an additional dedicated component and results in a non-optimized space occupation inside the device.

**[0011]** Alternatively, when the main contacts are present, the mobile main contact is machined so as it has a shape which performs the shielding function; in this case, particular care must be taken when shaping the contacts and assembling them on the structure of the switching device in order to avoid damages. This clearly results in a strong complication in the machinery of the mobile main contact and in assembling the switching device, with a consequent increase in manufacturing time and cost.

**[0012]** The main aim of the present invention is to provide a gas-switching device for high- or medium-voltage applications, which allows to overcome the above mentioned drawbacks, and in particular which has an optimized structure and can be realized by a simplified manner with respect to known nozzles.

**[0013]** Within the scope of this aim, an object of the present invention is to provide a gas-switching device for high- or medium-voltage applications, which is able to perform different operating functions with a reduced number of mechanical parts.

**[0014]** Another object of the present invention is to provide a gas-switching device for high- or medium-voltage applications, which allows easing mounting of a nozzle inside the switching device.

**[0015]** A further object of the present invention is to provide a gas-switching device for high- or medium-voltage applications which is highly reliable, relatively easy to realize and at competitive costs.

**[0016]** This aim, these objects and others which will become apparent hereinafter are achieved by a switching device for high and medium voltage applications, comprising at least a mobile arc contact and a corresponding fixed arc contact, and a nozzle having a hollow shaped body which is positioned inside the device around the zone where electric arcs form between said arc contacts during switching operations, said hollow shaped body having a first portion electrically conductive and a second portion made of electrically insulating material which surrounds at least partially said first portion, characterized in that said hollow shaped body is mechanically secured directly onto said mobile arc contact.

**[0017]** Further characteristics and advantages will become apparent from the description of some preferred but not exclusive embodiments of a nozzle according to the invention, illustrated only by way of non-limitative ex-

amples with the accompanying drawing of Figure 1 which is a sectional plan view schematically illustrating the nozzle according to the invention used inside the interruption unit of a circuit breaker.

**[0018]** The gas switching device according to the invention is particularly suitable for use in medium or high voltage circuit applications and will be described by making reference to its use, without intending however to limit in any way its possible applications.

**[0019]** Figure 1 schematically illustrates part of the interruption equipment of a circuit breaker in an open position; as shown, said circuit breaker comprises a puffer chamber 10, a fixed arc contact 1, realized for example by means of a conducting rod, a mobile arcing contact 2, constituted for example by a hollow metallic tube, which is operatively connected to suitable actuation means (not illustrated) devised to displace the mobile arc contact during operations from a first position in which it is electrically coupled to the fixed arc 1, and a second position where it is separated therefrom. The interruption equipment is normally placed inside a casing (not illustrated), made for example of porcelain or other suitable polymeric composite materials, which is filled with insulating gas, e.g. SF<sub>6</sub>.

**[0020]** In normal operating conditions, the two arc contacts 1 and 2 are electrically coupled with the head of the fixed contact 1 housed inside the tubular body of the mobile arc contact 2; if opening of the breaker occurs (direction of the mobile equipment along the arrow 3), an electric arc normally strikes at the zone 20 where the two arcing contacts start to separate; a suitable nozzle is positioned around the zone 20 where the arcs strike in order to quench and restrain their effects.

**[0021]** Advantageously, the nozzle according to the invention comprises a hollow shaped body 100, preferably having a substantially cylindrical symmetry, and comprising a first portion 101 electrically conductive, and a second portion 102 which is made of substantially electrically insulating material that surrounds at least partially the first portion 101.

**[0022]** According to a preferred embodiment, the nozzle is constituted by a unique integral body with the first portion 101 incorporated in the second portion 102.

**[0023]** Further, the first portion 101 is advantageously shaped so as to act as an electric shield; in particular, the first portion 101 has preferably a substantially annular shape, for example a shaped annular body or a shaped ring, placed at an inner circumference of the hollow body, and the second portion 102 surrounds the first portion 101 without fully enclosing it, i.e. it is shaped so as the internal boundary surface 120 of the annular body is not in contact with the second portion but is left uncovered. This allows to have a smooth electrical field distribution between the open arcing contacts and its surroundings, and to optimize the shielding function according to a simple and functionally optimized solution.

**[0024]** The second portion 102 has a lower tip part 103 which has a shaped profile so as to act as a puffer cap,

i.e. during opening it acts as a piston and compresses the gas inside the chamber 10, thus allowing flow of the gas through the nozzle itself.

**[0025]** Preferably, the second portion 102 is made of moldable insulating material, such as a thermoplastic resin able to withstand high temperature and pressure conditions; in this way, the second portion 102 of the nozzle body according to the invention can be advantageously manufactured by direct injection molding, that allows to properly shaping the second portion in a relatively easy and cost-effective way.

**[0026]** Proper moldable insulating materials for the second portion 102 are for example fluorine based compounds, preferably a fluorinated co-polymer ethylene-propylene, commercially known as FEP, or perfluoroalkoxy polymers, commercially known as PFA, both produced by DuPont or by Dyneon, or mixtures thereof. Particularly suitable for being used in the second portion 102 are materials of the family of PFA which comprise copolymer of tetrafluoroethylene and a perfluoropropylvinylether, commercially known as Hyflon PFA, or a perfluoromethylvinylether, commercially known as Hyflon MFA, both produced by Solvay.

**[0027]** In a preferred embodiment, the first portion 101 is also realized by using a moldable conductive material, and comprises an insulating matrix and a filler. The insulating matrix is realized by means of a material selected from those above indicated for the second portion 102, e.g. FEP, PFA, or mixtures thereof; advantageously, both portions 101 and 102 are realized using the same moldable insulating material.

**[0028]** In turn, the filler is made of one or more electrical conductive materials, for example graphite or carbon or superconductive carbon or mixtures thereof, preferably in form of powder or grains of proper dimensions, chosen in the range from nanometers to millimeters. In order to ensure a proper conductivity and stability of the material, the volume of the filler is chosen in the range between 0,1% and 40%, of the total volume of the first portion, preferably between 0,5% and 35%, more preferably between 1% and 30%.

**[0029]** According to this embodiment, the nozzle is preferably manufactured by co-injection molding of the materials forming the two portions in a unique mold; this allows to manufacture the nozzle according to a process which is extremely simple and at lower cost with respect to known solutions.

**[0030]** Alternatively, the first portion 101 can be made completely of a metallic annular piece; according to this solution, the nozzle is manufactured positioning in a mold the first portion 101 and then injecting the moldable insulating material of the second portion 102 directly thereon.

**[0031]** As previously mentioned, the nozzle according to the invention is suitable for applications with different types of high-or medium voltage gas insulated switching devices, in particular circuit breakers; accordingly, the present invention also relates to a high-or medium volt-

age gas insulated switching device comprising a nozzle as previously described.

**[0032]** As mentioned above, the nozzle is positioned around the arc contacts 1 and 2, i.e. when they are in electrical coupling, in order to delimit the zone 20 where the electric arcs form between them during opening and closing operations; according to a particularly preferred embodiment, shown in figure 1, the nozzle is mechanically secured directly onto the mobile arc contact 2 by means of connecting means 110. In this way, assembly steps are significantly simplified with respect to known solutions; further, this solution is independent from the presence of the so-called main or permanent contacts, thus resulting in a greater flexibility of applications and reduction of overall production costs.

**[0033]** The nozzle is mechanically secured directly onto the mobile arc contact 2 by means of conductive connecting means 110, e.g. metallic screw means or nails or rivets, which are advantageously configured and positioned so as to electrically connect the first portion 101 with the arc contact 2; in this way the conductive part of the nozzle is at the same voltage of the mobile arc contact 2, thus allowing the electric shielding action.

**[0034]** In this way, the connecting means 110 perform at the same time both mechanical and electrical functions, with a consequent further simplification in realizing and assembling the switching device, according to an extremely compact constructive solution.

**[0035]** In practice, it has been found that the nozzle according to the present invention fully achieves the intended aim and objects, giving several advantages with respect to prior art solutions. In fact, as previously described, the nozzle is realized by a unique body which, thanks to its innovative structure, is able to perform several functions which in the prior art are instead performed by several different elements; in particular, the nozzle according to the present invention is able to work at the same time, not only as part an arc quenching element, but also as an electric shield, and also as a puffer cap. Further, it can be realized by means of extremely simplified manufacturing operations, thus obtaining significant savings in terms of material, time and production costs.

**[0036]** Finally, its assembling inside a gas-switching device, and connections with the other components of it, are very simple, functionally effective and fast with an optimized internal space occupation. This results in an overall improved switching device.

**[0037]** The nozzle and the related switching device thus conceived, are susceptible of modifications and variations, all of which are within the scope of the inventive concept; all the details may furthermore be replaced with technically equivalent elements. For example the electrically conductive portion could be completely incorporated inside and fully covered by the second portion 102.

## Claims

1. Gas switching device for high and medium voltage applications, comprising at least a mobile arc contact (2) and a corresponding fixed arc contact (1), and a nozzle having a hollow shaped body (100) which is positioned inside the device around the zone (20) where electric arcs form between said arc contacts (1, 2) during switching operations, said hollow shaped body (100) having a first portion (101) electrically conductive and a second portion (102) made of electrically insulating material which surrounds at least partially said first portion (101), **characterized in that** said hollow shaped body is mechanically secured directly onto said mobile arc contact (2).
2. Gas switching device according to claim 1, **characterized in that** said nozzle is mechanically secured directly to the mobile arc contact (2) by means of conductive connecting means (110) which are configured so as to electrically connect said mobile arc contact (2) to said first portion (101).
3. Gas switching device according to claim 1, **characterized in that** said second portion (102) has a lower tip part (103) which has a shaped profile so as to act as a puffer cap.
4. Gas switching device according to claim 1, **characterized in that** said hollow shaped body (100) is realized in a single body with said first portion (101) incorporated in said second portion (102).
5. Gas switching device according to claim 1, **characterized in that** said first portion (101) is shaped so as to act as an electric shield.
6. Gas switching device according to one or more of the preceding claims, **characterised in that** said first portion (101) has a substantially annular shape and is positioned along an inner circumference path of the hollow shaped body (100).
7. Gas switching device according to one or more of the preceding claims, **characterised in that** said first portion (101) and /or said second portion (102) comprise moldable materials.
8. Gas switching device according to claim 7, **characterized in that** said first portion (101) is made of a matrix of substantially moldable insulating material and a conductive filler.
9. Gas switching device according to claim 8, **characterized in that** the volume of said filler is in the range between 0,1% and 40%, preferably 0,5% and 35%, more preferably 1% and 30%, of the total volume of said first portion.

10. Gas switching device according to one or more of the claims from 1 to 6, **characterized in that** the said first portion (101) is substantially made of a metallic piece.

#### Patentansprüche

1. Gas-Schaltvorrichtung für Mittel- oder Hochspannungsanwendungen, mit zumindest einem beweglichen Lichtbogenkontakt (2) und einem entsprechenden feststehenden Lichtbogenkontakt (1), und einer Düse mit einem hohlen Formkörper (100), der im Inneren der Vorrichtung um diejenige Zone (20) herum positioniert ist, in der sich während Schaltvorgängen elektrische Lichtbögen zwischen den Lichtbogenkontakten (1, 2) bilden, wobei der hohle Formkörper (100) einen ersten Abschnitt (101) aufweist, der elektrisch leitend ist, sowie einen zweiten Abschnitt (102), der aus elektrisch isolierendem Material gefertigt ist, das zumindest teilweise den ersten Abschnitt (101) umgibt, **dadurch gekennzeichnet, dass** der hohle Formkörper mechanisch unmittelbar an dem beweglichen Lichtbogenkontakt (2) befestigt ist.
2. Gas-Schaltvorrichtung nach Anspruch 1, **dadurch gekennzeichnet, dass** die Düse mechanisch unmittelbar an dem beweglichen Lichtbogenkontakt (2) befestigt ist mit Hilfe von leitfähigen Verbindungseinrichtungen (110), die so gestaltet sind, dass sie den beweglichen Lichtbogenkontakt (2) elektrisch mit dem ersten Abschnitt (101) verbinden.
3. Gas-Schaltvorrichtung nach Anspruch 1, **dadurch gekennzeichnet, dass** der zweite Abschnitt (102) einen unteren Spitzenteil (103) aufweist, dessen Profil so geformt ist, dass er als eine Blaskappe wirkt.
4. Gas-Schaltvorrichtung nach Anspruch 1, **dadurch gekennzeichnet, dass** der hohle Formkörper (100) als ein einziger Körper mit dem ersten Abschnitt (101) ausgeführt ist, der in den zweiten Abschnitt (102) eingebaut ist.
5. Gas-Schaltvorrichtung nach Anspruch 1, **dadurch gekennzeichnet, dass** der erste Abschnitt (101) so geformt ist, dass er als eine elektrische Abschirmung wirkt.
6. Gas-Schaltvorrichtung nach einem oder mehreren der vorherigen Ansprüche, **dadurch gekennzeichnet, dass** der erste Abschnitt (101) im Wesentlichen eine Ringform besitzt und entlang einer Innenumfangslinie des hohlen Formkörpers (100) positioniert ist.
7. Gas-Schaltvorrichtung nach einem oder mehreren

der vorherigen Ansprüche, **dadurch gekennzeichnet, dass** der erste Abschnitt (101) und/oder der zweite Abschnitt (102) formbare Materialien aufweisen.

8. Gas-Schaltvorrichtung nach Anspruch 7, **dadurch gekennzeichnet, dass** der erste Abschnitt (101) aus einer Matrix aus im Wesentlichen formbarem Isoliermaterial und einem leitfähigen Füllstoff gefertigt ist.
9. Gas-Schaltvorrichtung nach Anspruch 8, **dadurch gekennzeichnet, dass** das Volumen des Füllstoffes in dem Bereich zwischen 0,1% und 40%, bevorzugt zwischen 0,5% und 35%, insbesondere bevorzugt zwischen 1% und 30%, des Gesamtvolumens des ersten Abschnitts liegt.
10. Gas-Schaltvorrichtung nach einem oder mehreren der Ansprüche 1 bis 6, **dadurch gekennzeichnet, dass** der erste Abschnitt (101) im Wesentlichen aus einem metallischen Teil gefertigt ist.

#### Revendications

1. Dispositif de commutation sous atmosphère gazeuse pour des applications de haute et moyenne tensions, comprenant au moins un contact d'arc mobile (2) et un contact d'arc fixe (1) correspondant, et une buse ayant un corps (100) à forme creuse positionnée à l'intérieur du dispositif autour de la zone (20) dans laquelle les arcs électriques se forment entre lesdits contacts d'arc (1, 2) durant des opérations de commutation, ledit corps à forme creuse (100) ayant une première partie (101) conductrice de l'électricité et une deuxième partie (102) réalisée en un matériau isolant de l'électricité, qui entoure au moins partiellement ladite première partie (101), **caractérisé en ce que** ledit corps à forme creuse est fixé mécaniquement directement sur ledit contact d'arc mobile (2).
2. Dispositif de commutation sous atmosphère gazeuse selon la revendication 1, **caractérisé en ce que** ladite buse est fixée mécaniquement, directement sur le contact d'arc mobile (2), à l'aide de moyens de connexion (110) conducteurs, configurés pour relier électriquement ledit contact d'arc mobile (2) sur ladite première partie (101).
3. Dispositif de commutation sous atmosphère gazeuse selon la revendication 1, **caractérisé en ce que** ladite deuxième partie (102) présente une partie de bout inférieure (103) ayant une forme profilée, pour agir comme bouchon tampon.
4. Dispositif de commutation sous atmosphère gazeuse

se selon la revendication 1, **caractérisé en ce que** ledit corps (101) à forme creuse est réalisé en un corps unique, ladite première partie (101) étant incorporée dans ladite deuxième partie (102).

5

5. Dispositif de commutation sous atmosphère gazeuse selon la revendication 1, **caractérisé en ce que** ladite première partie (101) est conformée pour agir comme blindage électrique.

10

6. Dispositif de commutation sous atmosphère gazeuse selon l'une ou plusieurs des revendications précédentes, **caractérisé en ce que** ladite première partie (101) présente une forme sensiblement annulaire et est positionnée le long d'un chemin à circonférence intérieure du corps à forme creuse (100).

15

7. Dispositif de commutation sous atmosphère gazeuse selon l'une ou plusieurs des revendications précédentes, **caractérisé en ce que** ladite première partie (101) et/ou ladite deuxième partie (102) comprennent des matériaux moulables.

20

8. Dispositif de commutation sous atmosphère gazeuse selon la revendication 7, **caractérisé en ce que** ladite première partie (101) est formée d'une matrice de matériau isolant sensiblement moulable et d'une charge conductrice.

25

9. Dispositif de commutation sous atmosphère gazeuse selon la revendication 8, **caractérisé en ce que** le volume de ladite charge est dans la fourchette comprise entre 0,1 % et 40%, de préférence entre 0,5 % et 35 %, de manière mieux préférée entre 1 % et 30 %, du volume total de ladite première partie.

30

35

10. Dispositif de commutation sous atmosphère gazeuse selon l'une ou plusieurs des revendications 1 à 6, **caractérisé en ce que** ladite première partie (101) est sensiblement formée d'une pièce métallique.

40

45

50

55

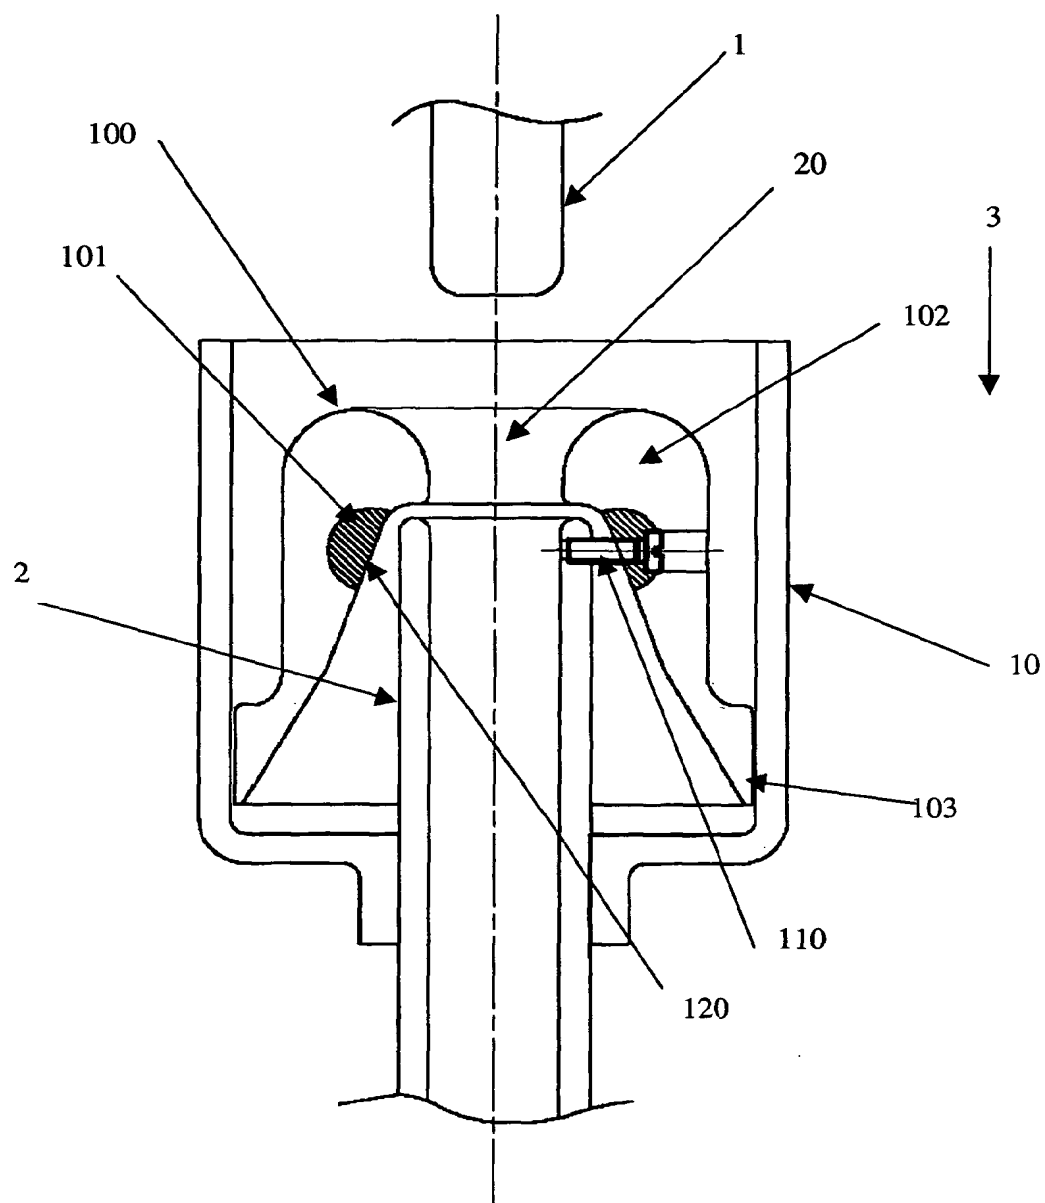


FIG. 1